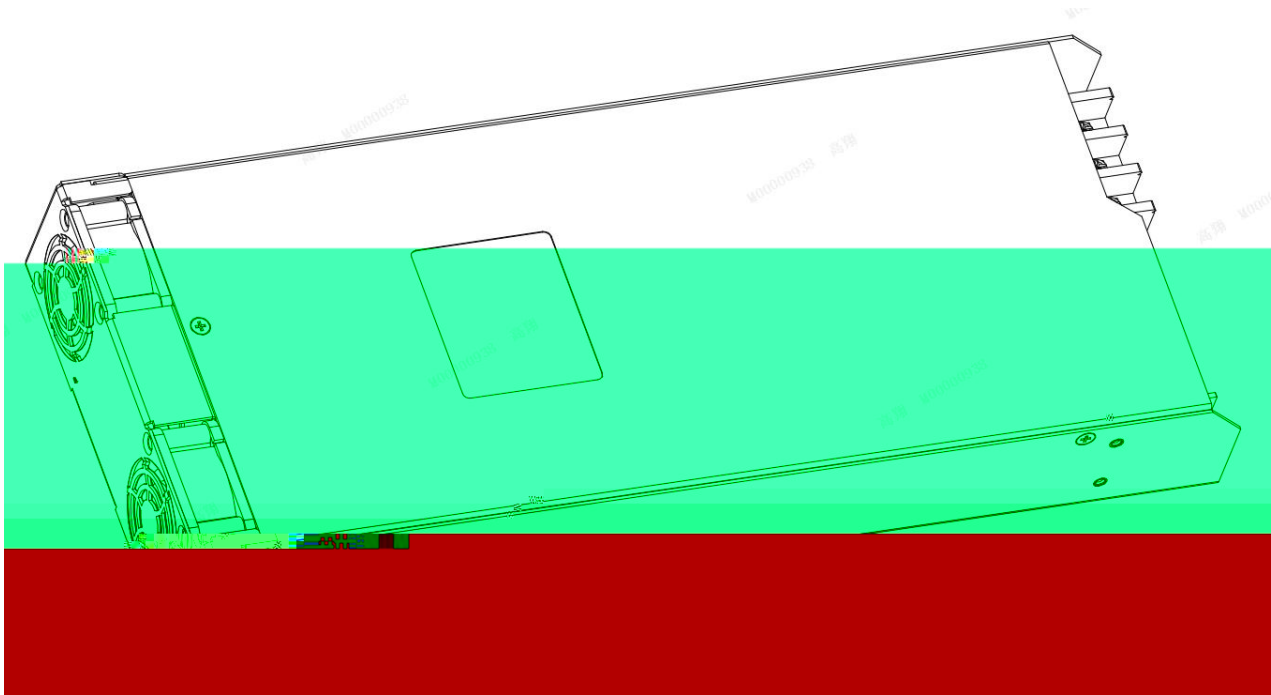

[illegible]

EMC



AC/DC

- 1 : -15°C to +45°C
- 2 : -40°C to +85°C
- 3 : 95%
- 4 3000
- 5 3000
- 6 70~106KPa
- 7
- 8

1		Vac	180	220	280	
2		Hz	45	50	65	
3		A			24	
4		A			60	264V
5	PF			0.95		
6	I THD	%				

7		S			5	-25	2
	25		40s	5		AC/DC	EMI
	us						

	1		V _{dc}	55	60	65	RTW1			
	2		V _{dc}	59	59.5	60				
	2		A	0		45				
	3					±2				
	4					±2				
	5					±1				
	6		m V			600				
	7		Vo			±5%	25%	50%	25%	50%
			uS			500	75%	50%		1A/ S
	8		Vo			±5%				
	9		mS			500	90%			10%
	10		/			±0.02				
	11		uF			3000	500ms/ 100 , 500ms.			
48V	1		V _{dc}	46.5	48	49.5				
	2		A	0.1		10				
	3					±2				
	4					±3				
	5					±1				
	6		m V			480				
	7		Vo			5%	25%	50%	25%	50%
			uS			500	75%	50%		1A/ S
	8		Vo			5%				
	9		mS			500 ms	90%			10%
	10		/			±0.02				
	11		uF			3000				

							100 , 500ms/ 500ms.
24V	1		V _{dc}	23	24	25	
	2		A	0.1		5	
	3					±2	
	4					±3	
	5					±1	
	6		m V			300	
	7		Vo			5%	25% 50% 25% 50%
			uS			500	75% 50% 1A/ S, 50Hz~ 100Hz
	8		Vo			5%	
	9		mS			500 ms	10% 90%
	10		/			±0.02	
	11		uF			2000	100 , 500ms/ 500ms.
15V	1		V _{dc}	13	15	17	
	2		A	0.1		1.5	
	3					±10	
	4					±10	
	5					±5	
	6		m V			300	
	7		Vo			5%	25% 50% 25% 50%
			uS			500	75% 50% 1A/ S, 50Hz~ 100Hz
	8		Vo			5%	
	9		mS			500 ms	10% 90%
	10		/			±0.02	
	11		uF			470	100 , 500ms/ 500ms.

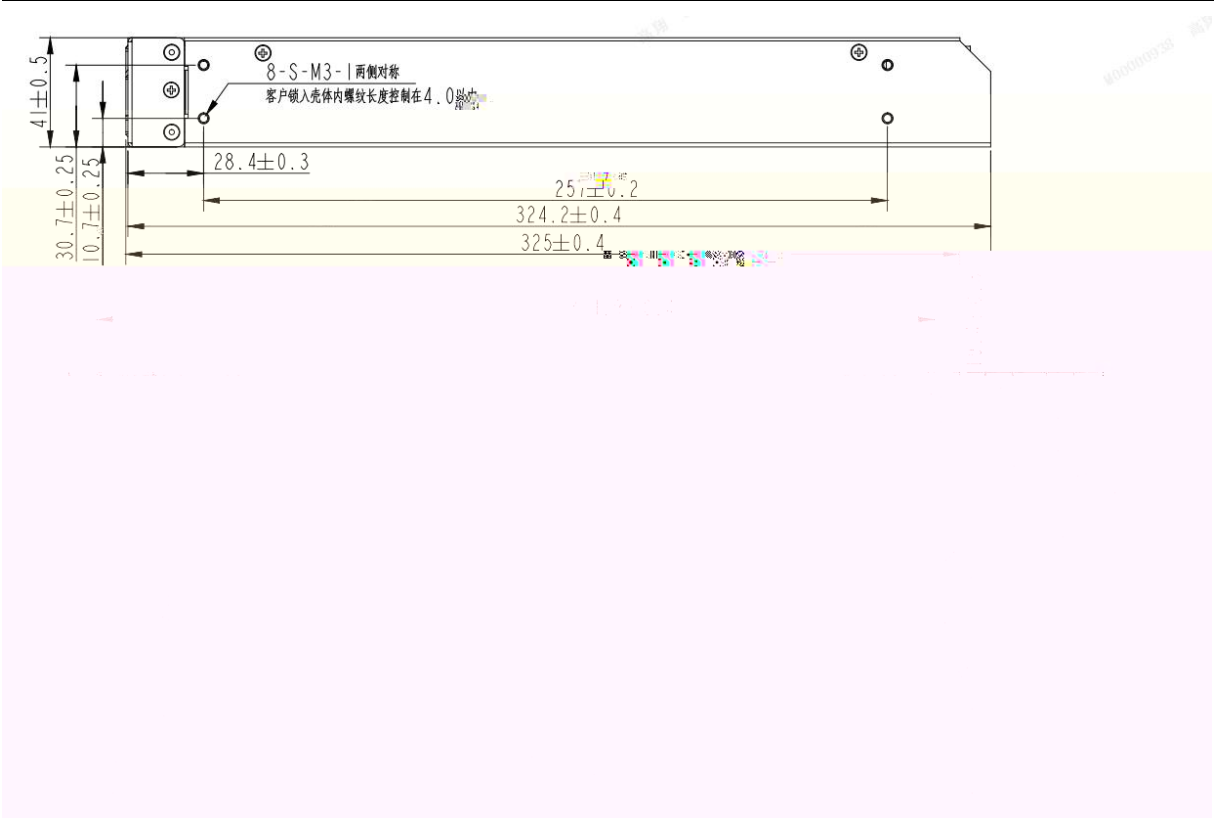
		/				
	V		285	/	320	10%
	V		260	/	290	
	V		140	/	160	10%
	V		160	/	180	
	V				78	
	A				53	
	A					
48V	V		51		58	
48V	A		12		18	
48V	A					
24V1	V		27		32	
24V1	A		6		18	
24V1	A					
+15V	V	00	19		22	
15V	A		3		5	
15V	A					

EMC

(CE)	CLASS A	EN55022
(RE)	CLASS A	
	6KV 8KV Class B :IEC61000-4-2;	
	8KV 10KV Class B IEC61000-4-2;	
CS)	IEC61000-4-6 LEVEL3 Class A	
(RS)	IEC61000-4-3 LEVEL3 Class A	
(EFT)	IEC61000-4-4 LEVEL4 Class A	
	IEC61000-4-5 LEVEL4 Class A 2KV, 4KV	
	IEC61000-4-11 70%U 100ms, 0%U 10ms, 0 Class B	

Class A
Class B
Class C
Class D

1		1.5 60dB A 1	
2	MTBF	100000H Telcordia SR332	
3		*5 9Hz 3.5mm 9 200 Hz 10m/s2,3 5 3*50	
4		250m/s2 6ms 6	
5		500	
6			
7		RoHs2.0	
8		L/N/PE 5Min L1/L2/L3 2Min 10	
9		ISO 13849-1 2006	PL-E



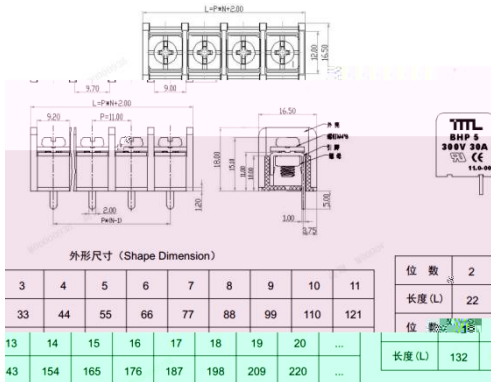



× × 325*130*41mm
()

	(BHP5-03-11.0-01)	1	L	AC
		2	N	AC
		3	PE	

	L (AT448080-1)		Vout1-		
			Vout1+		

	CJT C3030WR-2*7P	1/8/9	48VGND	48V	24/48V
		2/3/10	48V	48V	
		4/11	24V1GND	24V1	
		5/12	24V1	24V1	
		6/7	VCOM	15V	15V
		13	+15V	+15V	
		14	-15V	-15V	

	A2008WR-S1-F-2x4P	1	GND	ON/OFF 24/48V
		2	AC_OK	OK , 0.5V 4.5V 5.25V.
		3	DC_OK	OK , 0.5V 4.5V 5.25V.
		4	GND	ON/OFF 24/48V
		5	ON/OFF	SW 0.7V SW
		6	PE_OK	PE OK , PE 0.5V PE 4.5V 5.25V.
		7	GND	ON/OFF 24/48V
		8	NC	

		(																																												
	(BHP5-03-11.0-01)	 外形尺寸 (Shape Dimension) <table><tr><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td><td>11</td><td>位 数</td><td>2</td></tr><tr><td>33</td><td>44</td><td>55</td><td>66</td><td>77</td><td>88</td><td>99</td><td>110</td><td>121</td><td>长度 (L)</td><td>22</td></tr><tr><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>...</td><td>位 数</td><td>16</td></tr><tr><td>43</td><td>154</td><td>165</td><td>176</td><td>187</td><td>198</td><td>209</td><td>220</td><td>...</td><td>长度 (L)</td><td>132</td></tr></table>	3	4	5	6	7	8	9	10	11	位 数	2	33	44	55	66	77	88	99	110	121	长度 (L)	22	13	14	15	16	17	18	19	20	...	位 数	16	43	154	165	176	187	198	209	220	...	长度 (L)	132
3	4	5	6	7	8	9	10	11	位 数	2																																				
33	44	55	66	77	88	99	110	121	长度 (L)	22																																				
13	14	15	16	17	18	19	20	...	位 数	16																																				
43	154	165	176	187	198	209	220	...	长度 (L)	132																																				
	L (AT448080-1)																																													
	CJT C3030WR-2*7P																																													
	A2008WR-S1-F-2x4P																																													

	-40	+70°C	≤90%	
20cm		50cm		2

GB/T 2423.1-2008	2	A		
GB/T 2423.2-2008	2	B		
GB/T 2423.3-2016	2	Cab		
GB/T 2423.4-2008	2	Db	(12h	12h)
GB/T 2423.5-1995	2	Ea		
GB/T 2423.6-1995	2	Eb		
GB/T 2423.8-1995	2	Ed		
GB/T 2423.10-2008	2	Fc	(	)
GB/T 2423.11-1997	2	Fd		
GB/T 2423.22-2012	2	N		
EN 55032-2015				
GB T 17626.2-2018				
GB T 17626.3-2016				
GB T 17626.4-2018				
GB T 17626.5-2019			(	)
GB T 17626.6-2017				
GB T 17626.8-2006				
GB T 17626.11-2008				
GB/T 17625.8-2015/IEC61000-3-12:2004			16A	75A
GB/Z 17625.3-2000			16A	
GB/T 17625.7-2013			75A	
GB 4943.1-2011	1			
GB T 4798.1-2005			1	
GB T 4798.2-2008			2	